






1 FIX TO WALL

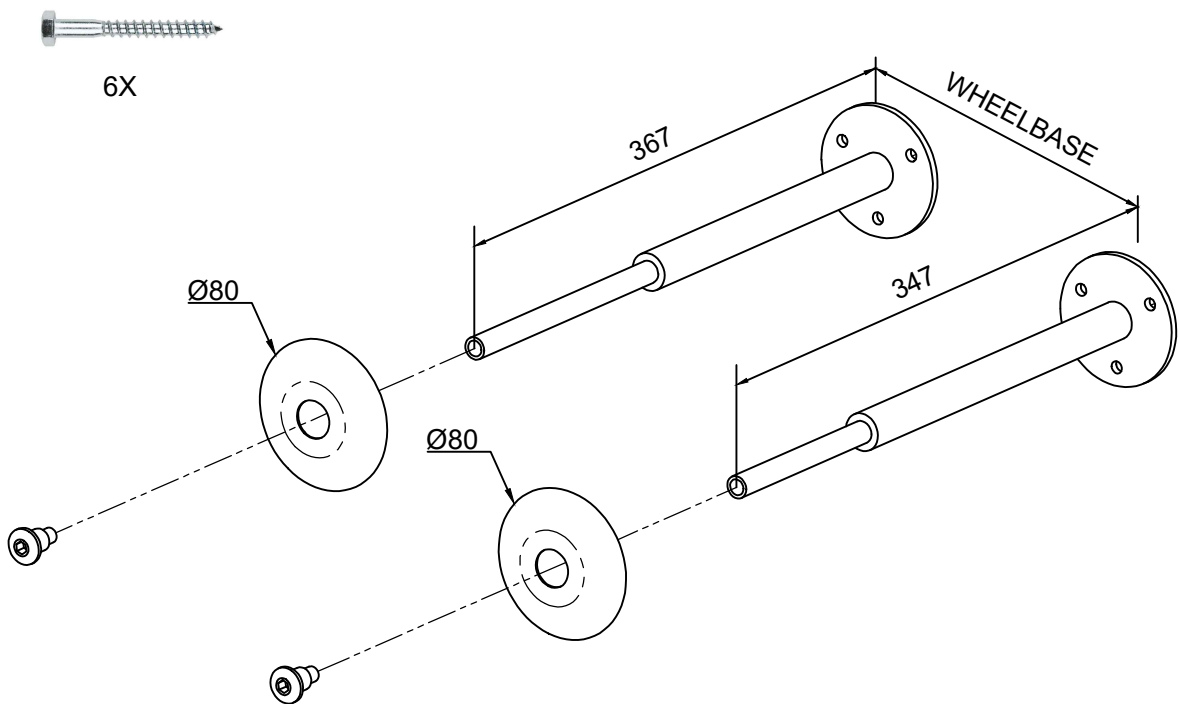

6X

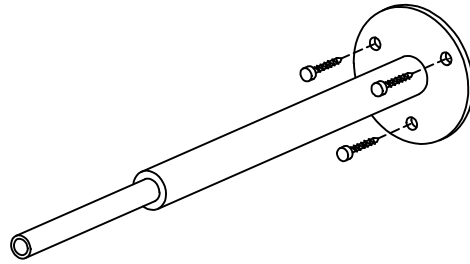

2 PLACE COVER PLATE

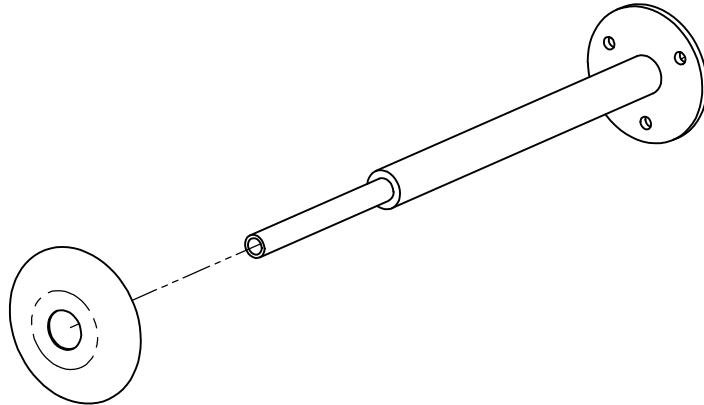

3 REMOVE THE AXLES FROM THE BICYCLE AND PLACE IT ON THE HANGERS

4 DRIVE THE SCREW INTO THE NEW AXIS

