



ACABADOS

- ① METAL LACADO NEGRO PINTURA POLVO 0102. REF:2505
- ② ACERO INOX SATINADO ESTANDAR. REF 2202

*NOTA:
MACIZAR BASE
BASE CON CONTERAS DE PLASTICO NEGRO

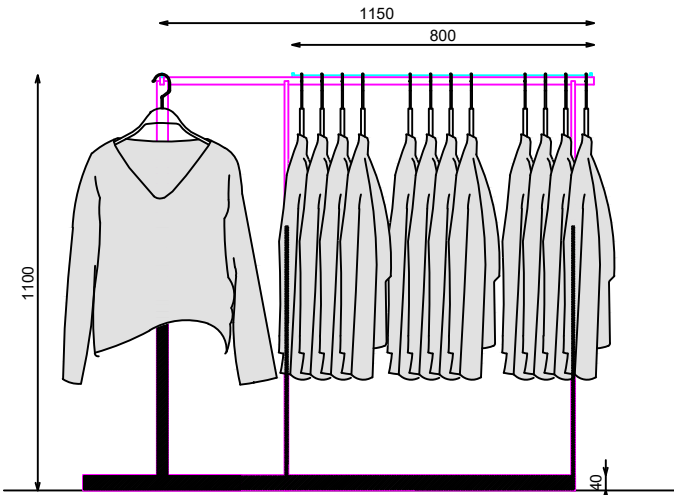


ALZADO FRONTAL

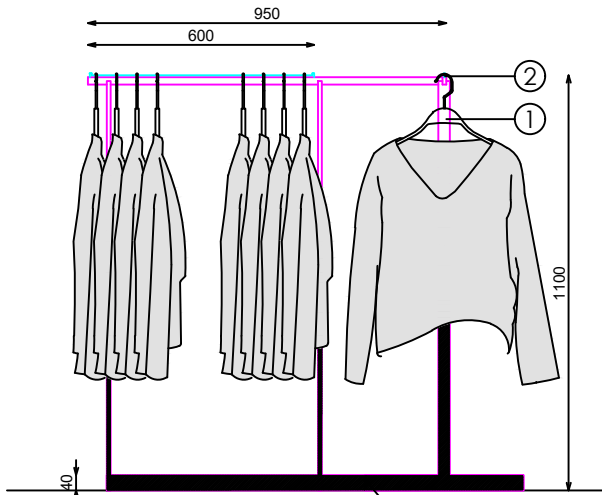


ALZADO LATERAL

MACIZAR

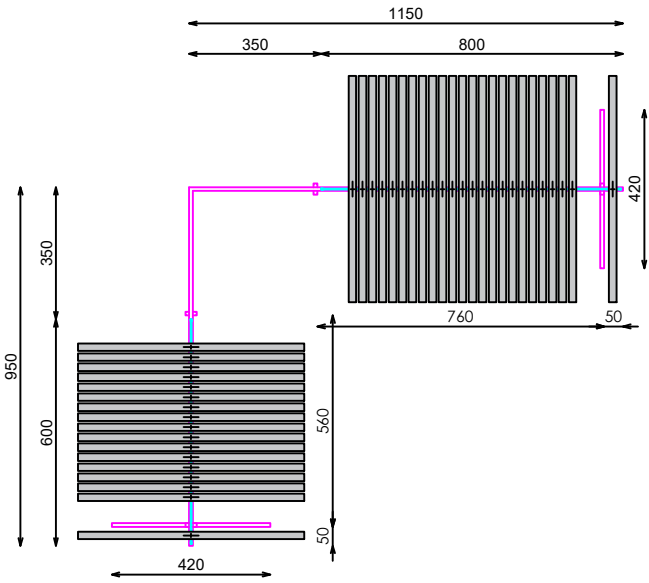


PLANTA

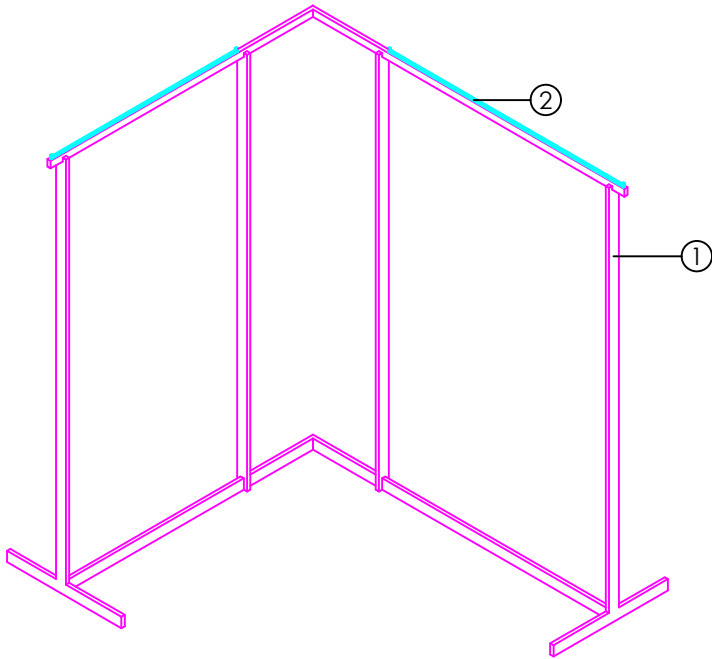


VISTA 3D


DETALLE A

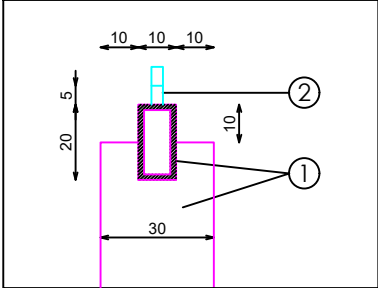

DETALLE B

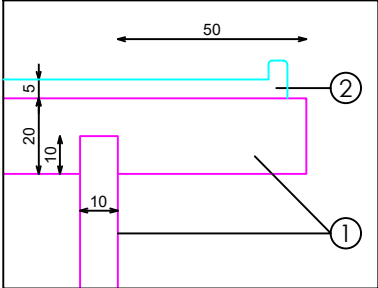



DETALLE C

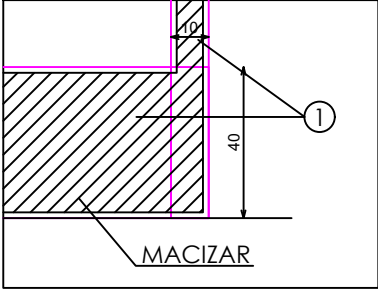

QTY数量	DESCRIBE描述	SUPPLIER供应部门	REFERENCE参考信息	MATERIAL材料	FINISH颜色	PROCESSES工艺	UNIT WEIGHT单件重量 (Kg)	TOTAL WEIGHT总重量 (Kg)
	8Z80131300	SUPPLIER	REFERENCE	Stainless不锈钢	黑色粉末喷涂金属漆0102 REF 2505/压条_2202号不锈钢细拉丝	cut/weld/drill/polish/paint	1.08	



*NOTA:
MACIZAR BASE
BASE CON CONTERAS DE PLASTICO NEGRO

* 备注：底座做实心加固处理
底座配黑色塑料脚垫

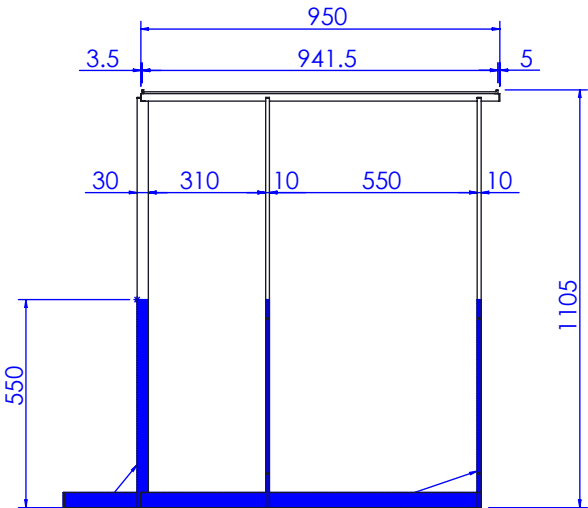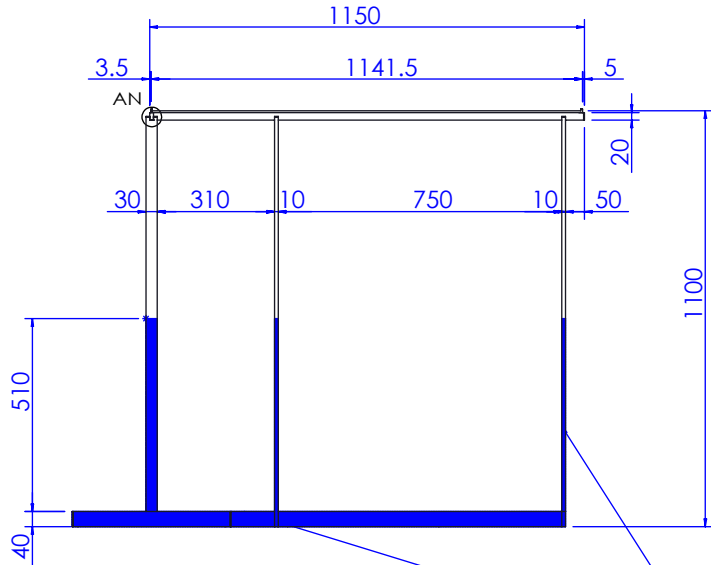


内部加铁条

激光割管：1、2、3、4、5、6、7
铁条大小：510x26x6mm 四根
1085x36x6 一根、885x36x6 一根
（大小根据实际情况调整、底部加塞
铁条根据胶塞位置开缺口）

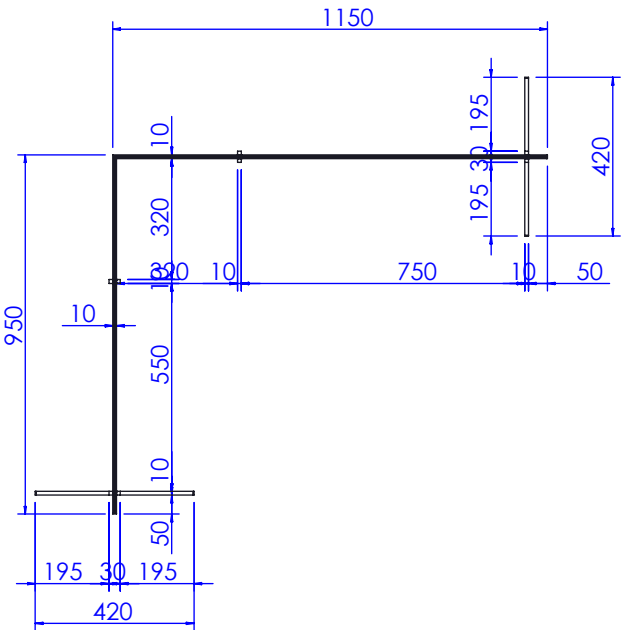

局部视图 AN
比例 1 : 2

尖角需要磨圆



局部视图 AM
比例 1 : 2

技术要求(Technical Requirements):
1、供货方要相应配同色的连接件; 螺栓类连接件要装在相应位置, 以防止孔位偏差;
(The supplier needs to provide the connector and match the color;
The threaded rod must be pre-installed into the correct location to avoid the deviation)
2、金属件要求无接缝, 焊接牢固, 无虚焊, 承重部位必须满焊;
(The metal parts must be smoothly, strong welding, full weld on the loading location)
3、金属件所有见光部位不允许有影响外观效果的焊疤;
(Forbid the welding mark on the appearance surface of metal parts)
4、注意公差配合: 镜子和玻璃尺寸, 需与挂臂配合的挂钩内卡口, 如未注明公差按负公差0.5mm加工.
(Take note the tolerance for mirror, glass, the hook which needs to assembled with bar and so on, the unspecified tolerance is -0.5mm.)
5、所有可见螺丝均为内六角螺丝.
(All the appearance screws must be allen screws)
6、所有镜子、玻璃、大理石4边和4角都要磨边, 金属件所有边角无坡锋\无毛刺, 防止伤人.
(All mirrors, glass, marble 4 sides and 4 angles need to sanding, all corners of metal furniture need to polish, no burr, prevent injuries.)
7、凡是涉及到走线的产品, 供货方必须穿好电线.
(The supplier must wear all wire.)
8、供货方必须装配好由供货方生产的配套产品, 例如层板托、连接件.
(the supplier must Pre assembled accessory, such as lamination, connector.)
9 所有部件焊接时要磨45°左右的斜边, 辅助焊接, 超过轮廓线外的焊点要磨平。

LISTA DE CORTES (POR UNIDAD)

	CANT.	DESCRIPCIÓN	长度	角度1
1	2	tubo 30x10x1.50	1043	0°
2	2	tubo 40x10x1.50	416	0°
3	1	tubo 40x10x1.50	1090	45°
4	1	tubo 40x10x1.50	890	0°
5	1	tubo 20x10x2	948	0°
6	1	tubo 20x10x2	1148	45°
7	2	tubo 30x10x1.50	1083	0°
8	1			
9	1			
10	2	tubo 20x10x2		
11	8	tubo 30x10x1.50	10	-
12	4	tubo 40x10x1.50		

