




AMPLIACION PROBADOR IZQUIERDO EXTREMO ESPEJO 110xH230 RESINA

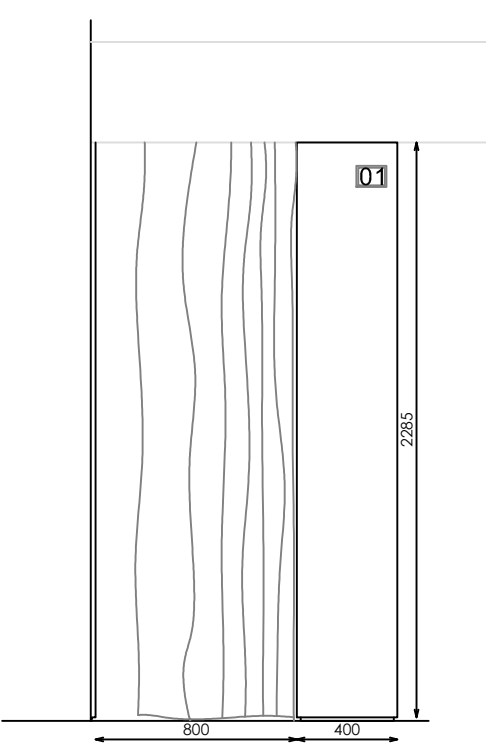


ALZADO

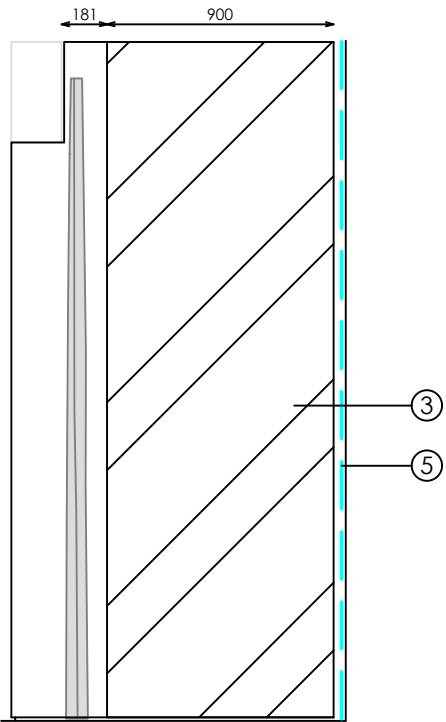


ALZADO LATERAL ESPEJO (A-A)

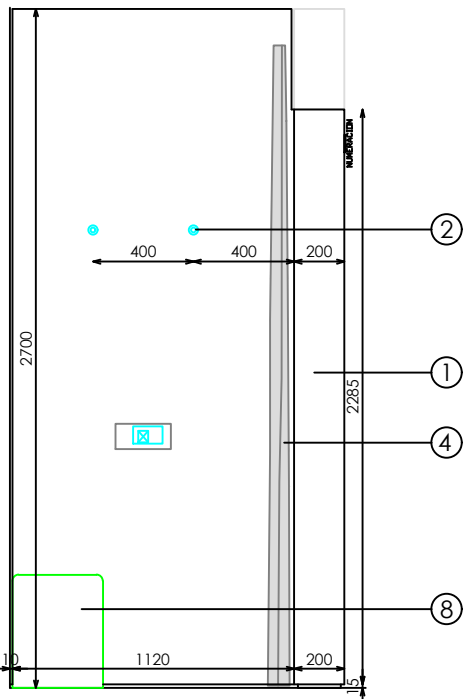

ALZADO LATERAL CUELGA (B-B)

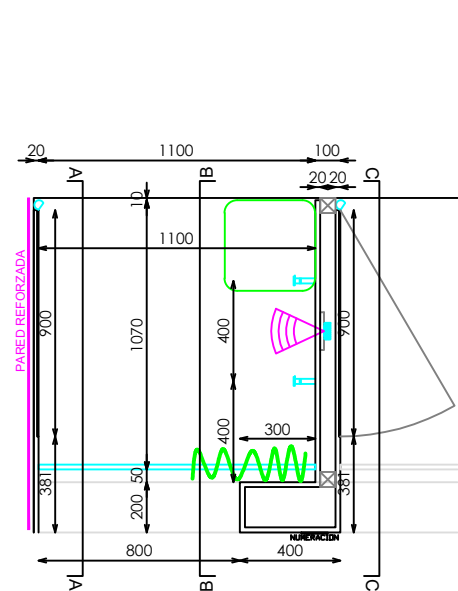

PLANTA

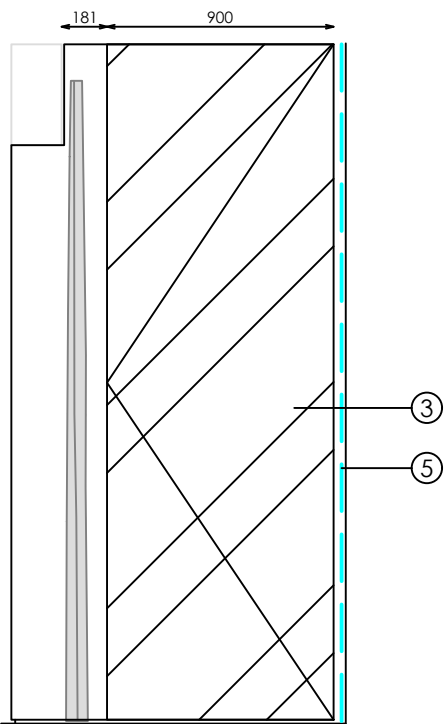


ALZADO LATERAL ESPEJO (C-C)


ACABADOS

- ① RESINA MARMUR NAVONA NCS 6005-Y20R EXTRA MATE
- ② ACERO INOX SATINADO ESTANDAR. REF 2202
- ③ ESPEJO PLATA
- ④ CORTINA CALE 25 S/N (MUESTRA APROBADA E) FRUNCE 100% LONGITUD BARRA
- ⑤ TILDA FAGERHULT 5W ACABADO ALUMINIO NATURAL
- ⑥ SENSOR DE PRESENCIA
- ⑦ SENSOR PARA CONTROL DE ILUMINACION (LIGHT CONTROLER)
- ⑧ KRION COLOSSEO GREY 6909 LISO MATE (LIJA 240)


DETALLE BARRA

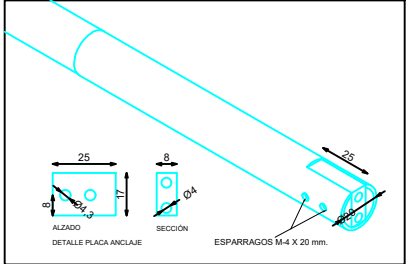


DETALLE COLGADOR

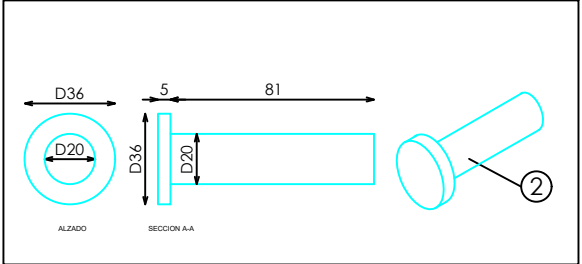


DETALLE CERRADURA ESPEJO/PANEL REGISTRABLE




DETALLE A




DET. OLLAOS CORTINA

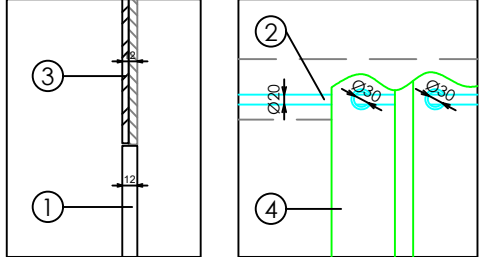

SENSOR DE PRESENCIA



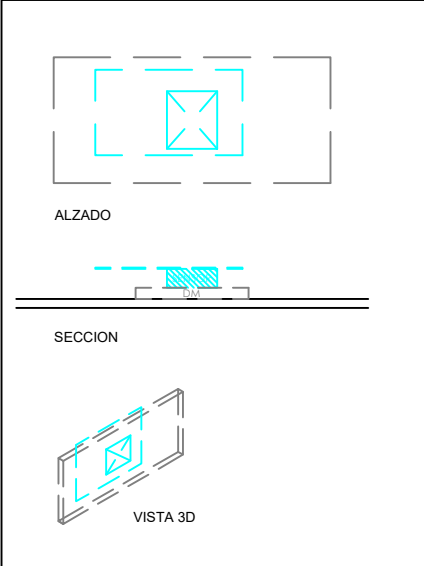


DETALLE NUMERO PROBADORES

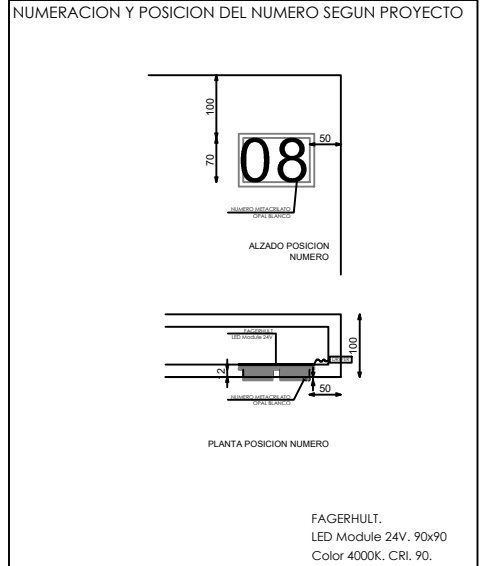

NOTA: El sensor de presencia se conectará con el número de la cabina hacia la que emite la onda. En caso de que el probador tenga mas de 3,00mts de longitud en alguno de sus lados se necesitara instalar 2 sensores de presencia.

QTY数量	DESCRIBE描述	SUPPLIER供应部门	REFERENCE参考信息	MATERIAL材料	FINISH颜色	PROCESSES工艺	UNIT WEIGHT单件重量 (Kg)	TOTAL WEIGHT总重量 (Kg)
	8Z70404500	SUPPLIER	REFERENCE			cut/weld/drill/polish/paint	325.04	

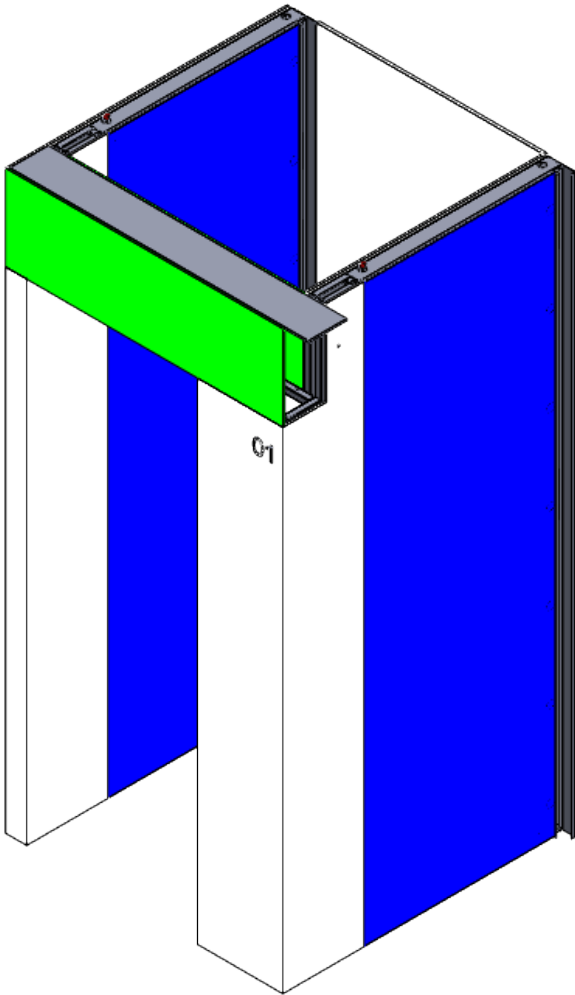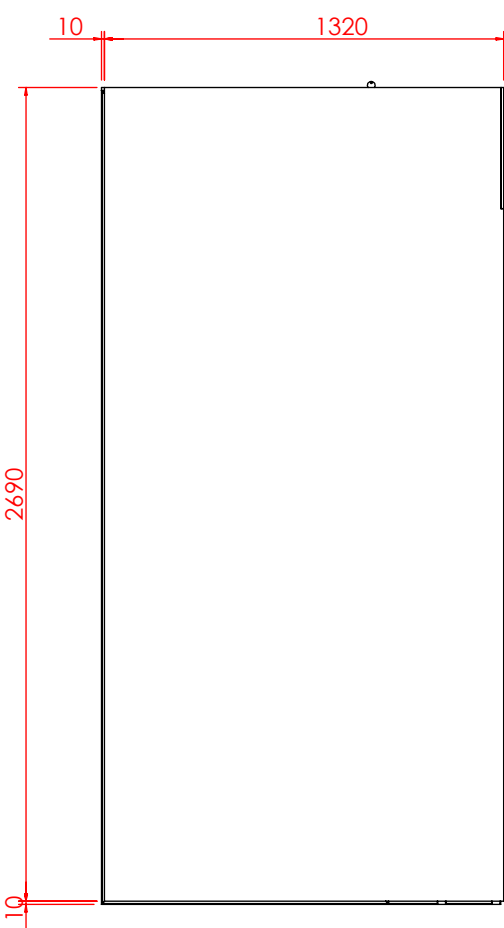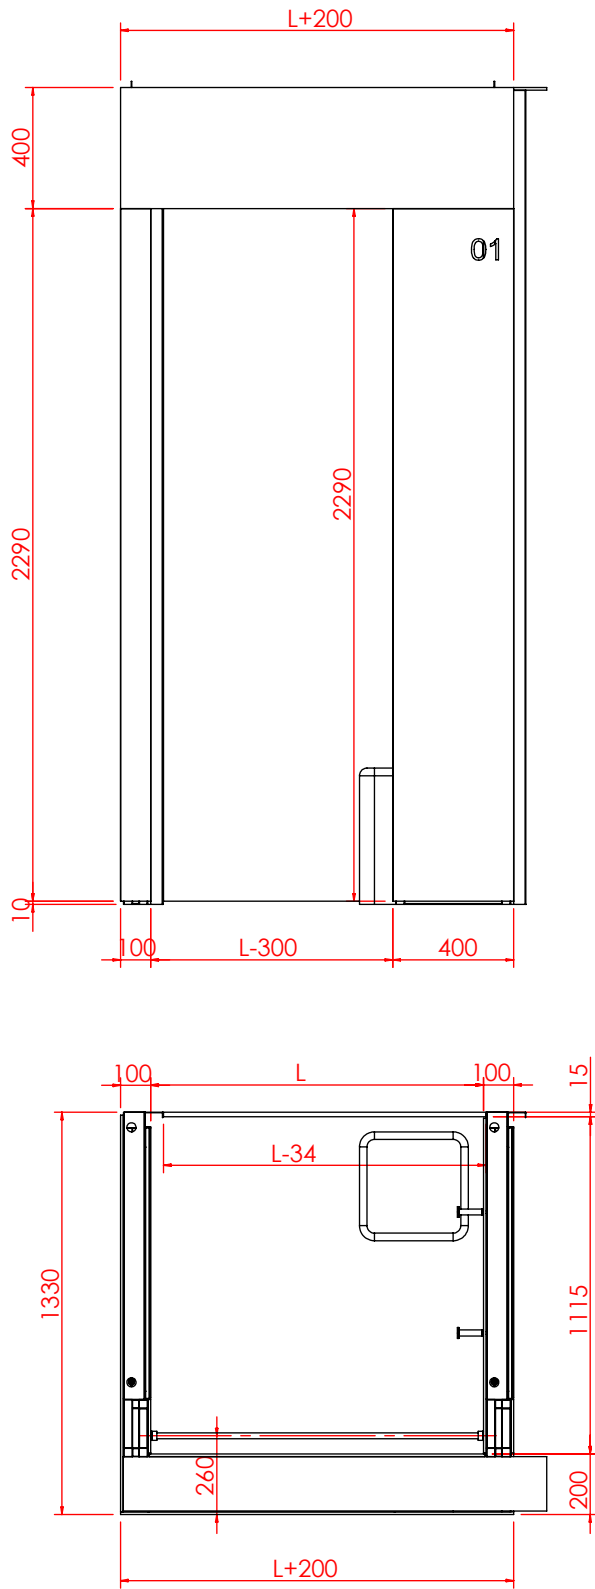


试衣间内空设为：L

- 技术要求(Technical Requirements):
- 1、供货方要相应配同色的连接件; 螺杆类连接件要装在相应位置, 以防止孔位偏差;
(The supplier needs to provide the connector and match the color;
The threaded rod must be pre-install into the correct location to avoid the deviation)
 - 2、金属件要求无披锋, 焊接牢固, 无虚焊, 承重部位必须满焊;
(The metal parts must be smoothly, strong welding, full weld on the loading location)
 - 3、金属件所有见光部位不允许有影响外观效果的焊疤;
(Forbid the welding mark on the appearance surface of metal parts)
 - 4、注意公差配合: 镜子和玻璃尺寸, 需与挂臂配合的挂钩内卡口, 如未注明公差按负公差0.5mm加工.
(Take note the tolerance for mirror, glass, the hook which needs to assembled with bar and so on, the unspecified tolerance is -0.5mm.)
 - 5、所有可见螺丝均为内六角螺丝.
(All the appearance screws must be allen screws)
 - 6、所有镜子、玻璃、大理石4边和4角都要磨边, 金属件所有边角无坡锋\无毛刺, 防止伤人.
(All mirrors, glass, marble 4 sides and 4 angles need to sanding, all corners of metal furniture need to polish, no burr, prevent injuries.)
 - 7、凡是涉及到走线的产品, 供货方必须穿好电线.
(The supplier must wear all wire.)
 - 8、供货方必须装配好由供货方生产的配套产品, 例如层板托、连接件.
(the supplier must Pre assembled accessory, such as lamination, connector.)
 - 9 所有部件焊接时要磨45°左右的斜边, 辅助焊接, 超过轮廓线外的焊点要磨平。

SHEET FORMAT 图纸大小	A3	UNITS单位	mm	8Z70404500	-总装	PROJECT NO.内部单号	STORE CODE店铺号
DRAWN BY制图	HaifengTong	SCALE比例	1:25			0000/00	0000
ORDER DATE下单日期	00/00/00	DELIVERY DATE入库日期	00/00/00			ORDER NO.订单号	000
CLIENT DRAWING客户图	Proy V.0	VERSION版本	V.0	AMPLIACION PROBADOR IZQUIERDO		ZARA	
ASSEMBLED IN:组装场所	INTERIOR	DRAWING TYPE图纸类型	MANUFACTURING	EXTREMO ESPEJO 110xH230 RESINA		CAAMAÑOASIA®	

QTY数量	DESCRIBE描述	SUPPLIER供应部门	REFERENCE参考信息	MATERIAL材料	FINISH颜色	PROCESSES工艺	UNIT WEIGHT单件重量 (Kg)	TOTAL WEIGHT总重量 (Kg)
	8Z70404500	SUPPLIER	REFERENCE			cut/weld/drill/polish/paint	325.04	

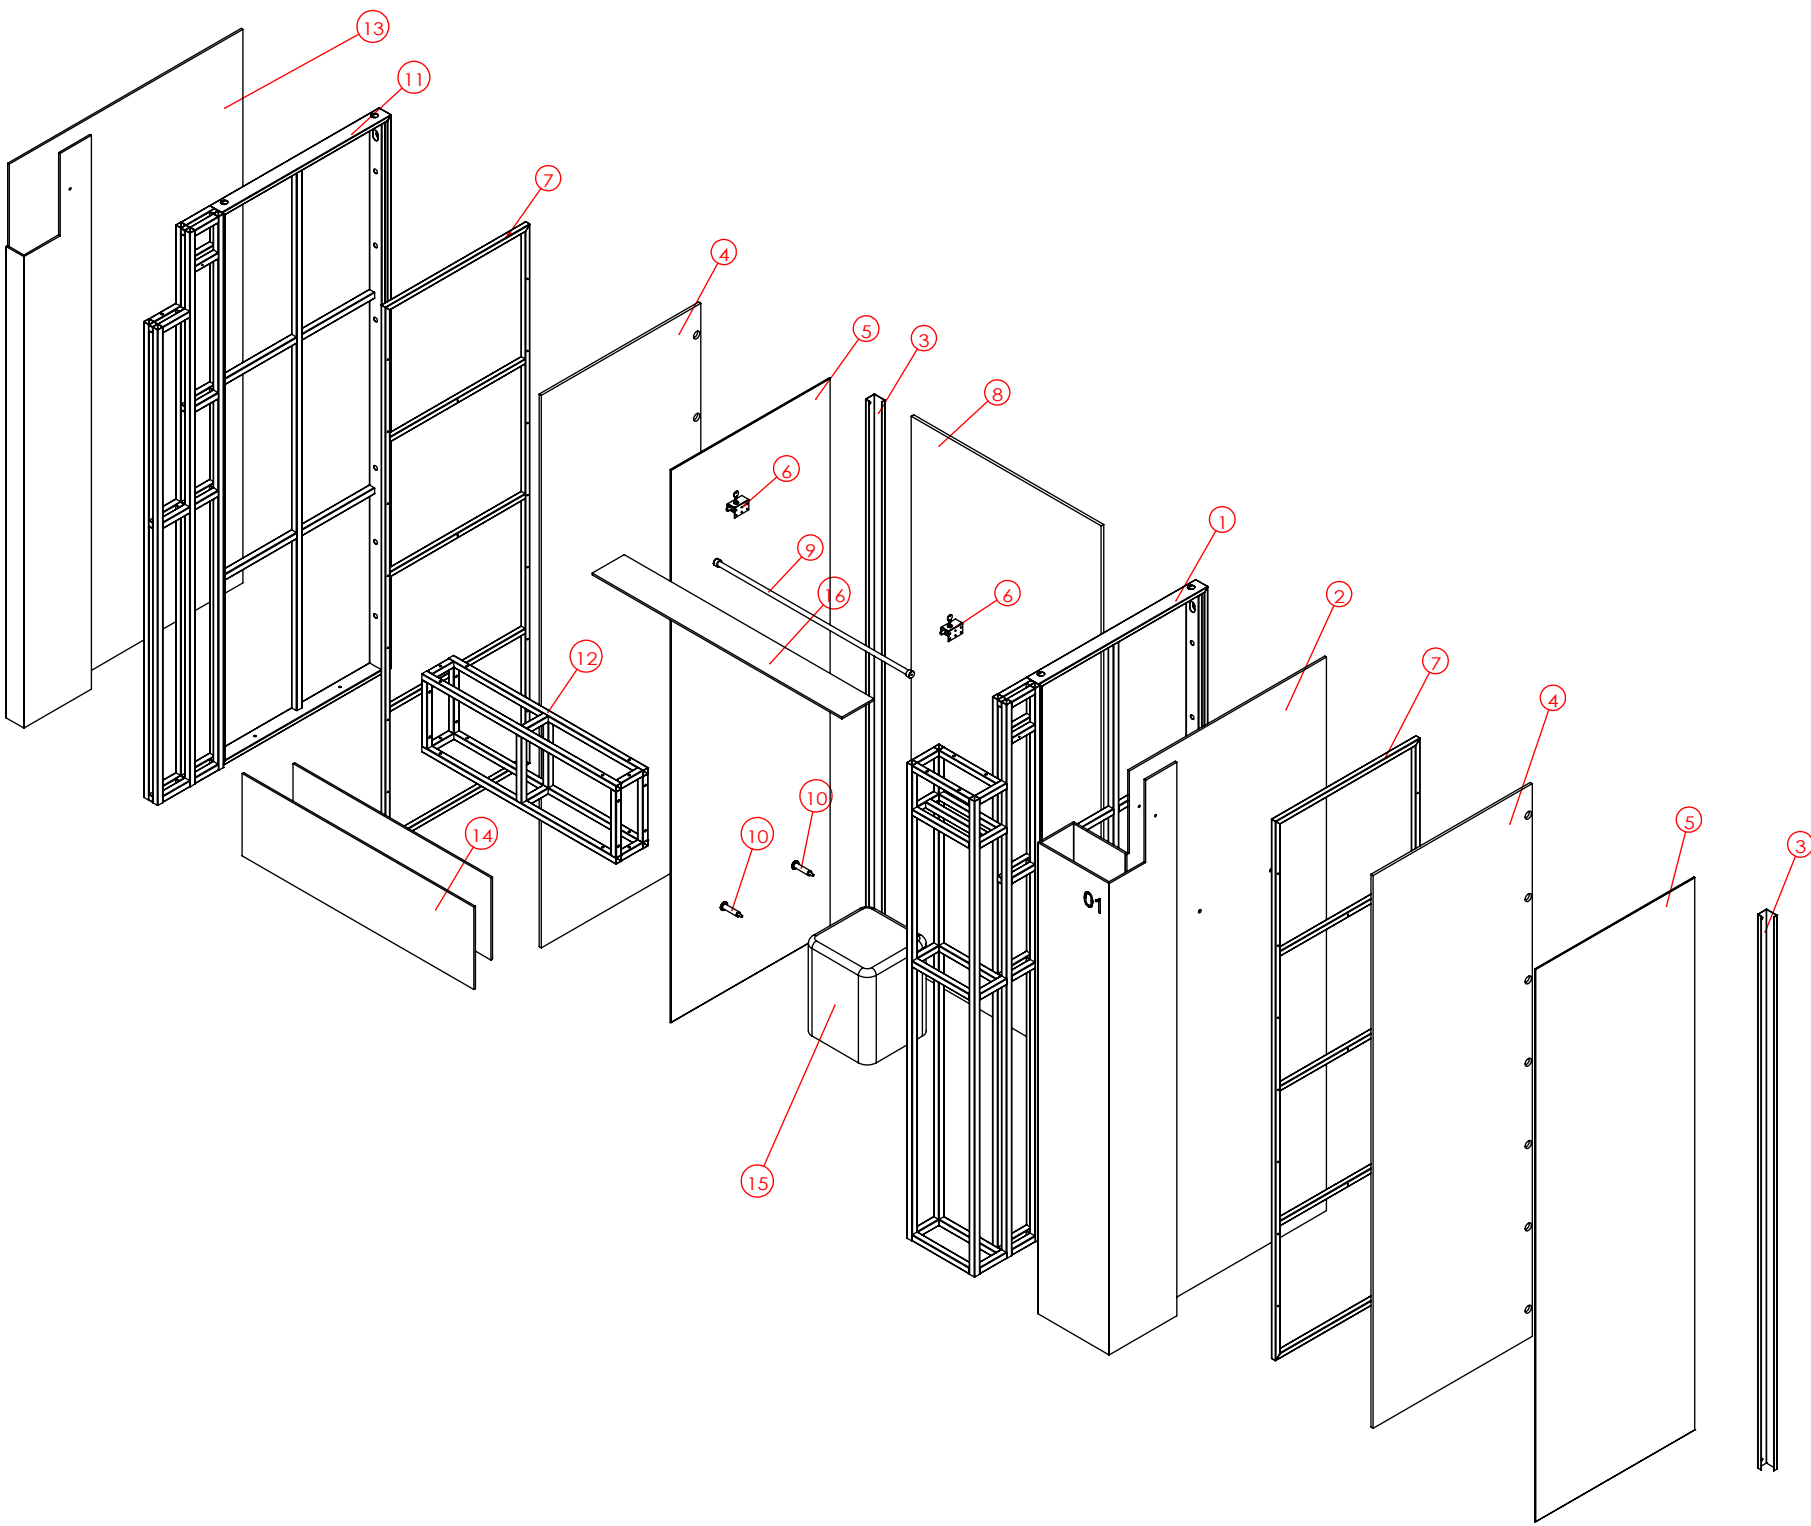

技术要求(Technical Requirements):
1、供货方要相应配同色的连接件; 螺杆类连接件要装在相应位置, 以防止孔位偏差;
(The supplier needs to provide the connector and match the color;
The threaded rod must be pre-install into the correct location to avoid the deviation)
2、金属件要求无接缝, 焊接牢固, 无虚焊, 承重部位必须满焊;
(The metal parts must be smoothly, strong welding, full weld on the loading location)
3、金属件所有见光部位不允许有影响外观效果的焊疤;
(Forbid the welding mark on the appearance surface of metal parts)
4、注意公差配合: 镜子和玻璃尺寸, 需与挂臂配合的挂钩内卡口, 如未注明公差按负公差0.5mm加工.
(Take note the tolerance for mirror, glass, the hook which needs to assembled with bar and so on, the unspecified tolerance is -0.5mm.)
5、所有可见螺丝均为内六角螺丝.
(All the appearance screws must be allen screws)
6、所有镜子、玻璃、大理石4边和4角都要磨边, 金属件所有边角无坡锋\无毛刺, 防止伤人.
(All mirrors, glass, marble 4 sides and 4 angles need to sanding, all corners of metal furniture need to polish, no burr, prevent injuries.)
7、凡是涉及到走线的产品, 供货方必须穿好电线.
(The supplier must wear all wire.)
8、供货方必须装配好由供货方生产的配套产品, 例如层板托、连接件.
(the supplier must Pre assembled accessory, such as lamination, connector.)
9 所有部件焊接时要磨45°左右的斜边, 辅助焊接, 超过轮廓线外的焊点要磨平。

SHEET FORMAT 图纸大小	A3	UNITS单位	mm	8Z70404500		-图纸1		PROJECT NO.内部单号	STORE CODE店铺号
DRAWN BY制图	HaifengTong	SCALE比例	1:25					0000/00	0000
ORDER DATE下单日期	00/00/00	DELIVERY DATE入库日期	00/00/00					ORDER NO.订单号	
CLIENT DRAWING客户图	Proy V.0	VERSION版本	V.0					000	
ASSEMBLED IN:组装场所	INTERIOR	DRAWING TYPE图纸类型	MANUFACTURING						

AMPLIACION PROBADOR IZQUIERDO
EXTREMO ESPEJO 110xH230 RESINA




No. 序号	Part Description 零件描述	Quantity 数量	Material 材质	Finish 表面
1	5Z71404701	1	镀锌方管	原色
2	5Z72404702	1	防火MDF	RESINA MARMUR NAVONA NCS 6005-Y20R EXTRA MATE
3	5Z71404804	2	Stainless不锈钢	2202号细拉丝
4	5Z72404805	2	防火MDF	白色底漆
5	5Z73404803	2	Mirror镜子	超白银镜
6	5Z11083308	2	IRON铁/Stainless不锈钢/防火MDF/Glass玻璃/Mirror镜子	GRIS METALIZADO 1401/M-2531白色手刷纹
7	5Z71404806	2	铁	自喷漆
8	5Z72404311	1	防火MDF	RESINA MARMUR NAVONA NCS 6005-Y20R EXTRA MATE
9	5Z71404302	1	Stainless不锈钢	ACERO INOX SATINADO ESTANDAR. REF 2202
10	5Z71404306	2	不锈钢	ACERO INOX SATINADO ESTANDAR. REF 2202
11	5Z71404501	1	镀锌方管	原色
12	5Z71404403	1	IRON铁	镀锌管
13	5Z72404502	1	防火MDF	RESINA MARMUR NAVONA NCS 6005-Y20R EXTRA MATE
14	5Z72404504	1	防火MDF	RESINA MARMUR NAVONA NCS 6005-Y20R EXTRA MATE
15	5Z75404312	1	Krion人造石	KRION COLOSSEO GREY 6909 LISO MATE (LIJA 240)
16	5Z72404314	1	防火MDF	白色底漆